


**Widely used for measuring deformations in three and four point bend tests, compression tests and a variety of general purpose deformations. These strain gaged devices come with a magnetic base for easy mounting.**



Model 3540 with 1 mm measuring range



Model 3540 deflectometer

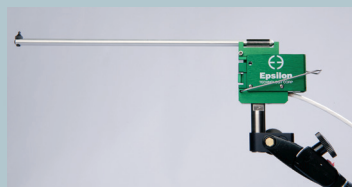

Model 3540 with 25 mm measuring range

Deflection is measured with a single arm with an attached spherical contact tip, similar to those on a dial indicator. The full bridge strain gaged construction provides an electrical output compatible with any electronics designed for a strain gaged transducer.

The magnetic base furnished with the gage can be mounted to the desired reference surface, whether flat or round. The tip can then be positioned to measure the deformation encountered during the test. The magnetic base can only be used for low and standard temperature testing. Elevated temperature testing requires additional support considerations.

All models feature a spring loaded arm that can break free in the event of excessive displacement, protecting the deflection gauge from damage. The upper arm exerts a small spring force against the specimen, which is sufficient to allow dynamic cyclic testing if desired, yet light enough in force to avoid influence on the test.

These units come standard with the arm set to measure downward deflections when oriented in the upright position. They can be used upside down or in any orientation. They may also be configured with the extensometer arm spring loaded downward. Specify this if desired. Note that the measuring ranges listed are total displacement.

The Model 3540 extensometers are strain gaged devices, making them compatible with any electronics designed for strain gaged transducers. Most often they are connected to a test machine controller. The signal conditioning electronics for the extensometer is typically included with the test machine controller or may often be added. In this case the extensometer is shipped with the proper connector and wiring to plug directly into the electronics. For systems lacking the required electronics, Epsilon can provide a variety of solutions, allowing the extensometer output to be connected to data acquisition boards, chart recorders or other equipment.

*See the electronics section of this catalog for available signal conditioners and strain meters.*

 See the Model 3540 deflectometer video

## Features

- Full bridge, 350 ohm strain gaged design for compatibility with nearly any test system.
- General purpose deflection sensor covers many test requirements.
- Comes with an adjustable magnetic base for easy mounting.
- Spring loaded arm detaches to prevent damage from overtravel.
- Meets ASTM and ISO accuracy classes as follows:  
 -001M, -004M, -006M, -005T, -015T, -025T:  
 ASTM E2309 Class A  
 ISO 9513 Class 1  
 ASTM E83 Class B-2 (assuming 50 mm gauge length per D790 and D6272)  
 -012M, -025M, -050M, -050T, -100T, -200T:  
 ASTM E2309 Class B  
 ISO 9513 Class 2  
 ASTM E83 Class C (assuming 50 mm gauge length per D790 and D6272)
- All standard units have linearity of 0.25% of FS or better.
- Includes the Epsilon Shunt Calibration System for on-site electrical calibration.
- Rugged, dual flexure design for improved performance.
- Includes high quality foam lined case.

## SPECIFICATIONS

- Excitation:* 5 to 10 VDC recommended, 12 VDC or VAC max.  
*Output:* 2 to 4 mV/V, nominal, depending on model  
*Linearity:*  $\leq 0.25\%$  of full scale measuring range  
*Temperature Range:* Standard (-ST) is -40 °C to +100 °C (-40 °F to 210 °F)  
 Optional (-LHT) is -270 °C to +200 °C (-454 °F to 400 °F)  
*Cable:* Integral ultra-flexible cable, 2.5 m (8 ft) standard  
*Operating Force:* 50 g typical

## OPTIONS

Connectors to interface to nearly any brand of test equipment  
 Arm orientation



## ORDERING INFORMATION

Model 3540 Available Versions: ANY combination of measuring range and temperature range listed below is available. *Other configurations may be available with special order; please contact Epsilon to discuss your requirements.*

Measuring Range	
METRIC	
-001M	1.0 mm
-004M	4.0 mm
-006M	6.0 mm
-012M	12.0 mm
-025M	25.0 mm
-050M	50.0 mm
U.S.A.	
-005T	0.050"
-015T	0.150"
-025T	0.250"
-050T	0.500"
-100T	1.000"
-200T	2.000"


Model Number 3540- \_\_\_\_\_ - \_\_\_\_\_

Temperature Range	
-LT	-270 °C to 100 °C (-454 °F to 210 °F)
-ST	-40 °C to 100 °C (-40 °F to 210 °F)
-HT1	-40 °C to 150 °C (-40 °F to 300 °F) <sup>1</sup>
-HT2	-40 °C to 200 °C (-40 °F to 400 °F) <sup>1</sup>
-LHT	-270 °C to 200 °C (-454 °F to 400 °F) <sup>1</sup>

<sup>1</sup> Magnetic base not suitable for high temperature use; 50 °C (125 °F) max.

Example: 3540-012M-ST: 12.0 mm measuring range, standard temperature option (-40 °C to 100 °C)

Visit our website at [www.epsilontech.com](http://www.epsilontech.com)  
 Contact us for your special testing requirements.

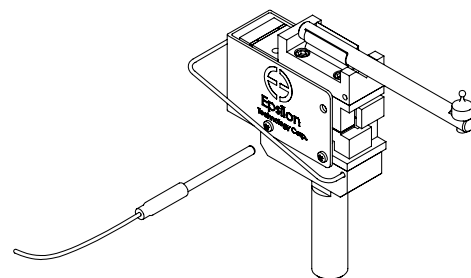

Without magnetic base

MODEL 3540 EXAMPLE